# SPECIFICATION SHEET

# FFS4V-25T1 | CHRISPER STATION

HEATED FRIED FOOD CABINET, 2 DOUBLE FLIP-UP DOORS, TOUCHSCREEN CONTROLS, PROGRAMMABLE MENU SETTINGS, REMOVEABLE WIRESHELF, HOLDS UP TO FOUR 18" X 26" STANDARD SHEET PANS, STAINLESS STEEL CONSTRUCTION.







**PROJECT** ITEM NO. NOTES MODEL NUMBER: FFS3V-25T1



### FEATURES & BENEFITS

☐ INSULATED STAINLESS STEEL CON- STRUCTION TWO DOUBLE FLIP-UP DOORS	☐ FLIP-UP DOORS STAY OPEN FOR EASY LOADING AND PRODUCT RETRIEVAL
☐ PRECISION-ENGINEERED HEAT DUCTS WITH A SINGLE FAN AND MOTOR	☐ EVEN HEAT DISTRIBUTION THROUGHOUT
☐ PROGRAMMABLE TOUCHSCREEN CON- TROLLER WITH MULTIPLE MENU SET- TINGS	☐ EACH SHELF CAN BE PROGRAMMED FOR A DIFFERENT MENU ITEM
☐ TWO SETS OF REMOVEABLE WIRESHELVES	☐ HOLDS UP TO FOUR 18" X 26" STANDARD SHEET PANS (PANS NOT INCLUDED)

# RISPER

## CONFIGURATIONS

MODEL	SHELF CLEARANCE in (mm)	UNIT C HEIGHT in (mm)	DEPTH in (mm)	WIDTH in (mm)	PRODUCT WEIGHT Ibs (kg)	VOLTS	WATTS	AMPS	PHASE	Hz	NEMA (6ft CORD)
☐ FFS4V-25T1	8.00 (203)	39.68 (1007)	34.25 (870)	24.50 (622)	197 (90)	208	3100	15	1	60	6-20P
☐ FFS4V-25T1	8.00 (203)	39.68 (1007)	34.25 (870)	24.50 (622)	197 (90)	230	2855	12	1	60	6-20P

#### TOUCHSCREEN CONTROLLER

Intuitive touchscreen interface with programmable recipes with adjustable temperature settings and individual pan timers; front access USB port. Set point temperature can be programmed up to 250°F(121°C) and preheats within 30 mins.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE FOR PRODUCT IMPROVEMENT AND INNOVATION

#### **CLEARANCES**

The front and rear must remain open and unobstructed. Allow at least 0.5" clearance on each side of the cabinet. Allow at least 2" for the power cord at the top of the cabinet. Do not place anything on the top of the cabinet. Cabinet must be placed on noncombustible surface.

#### WARRANTY

ONE YEAR LABOR PARTS & LABOR LIMITED WARRANTY












**KCL & REVIT DRAWINGS UPON REQUEST** 



PROJECT	
ITEM NO.	
NOTES	
MODEL NUMBER : FES3V-25T1	

## DRAWINGS

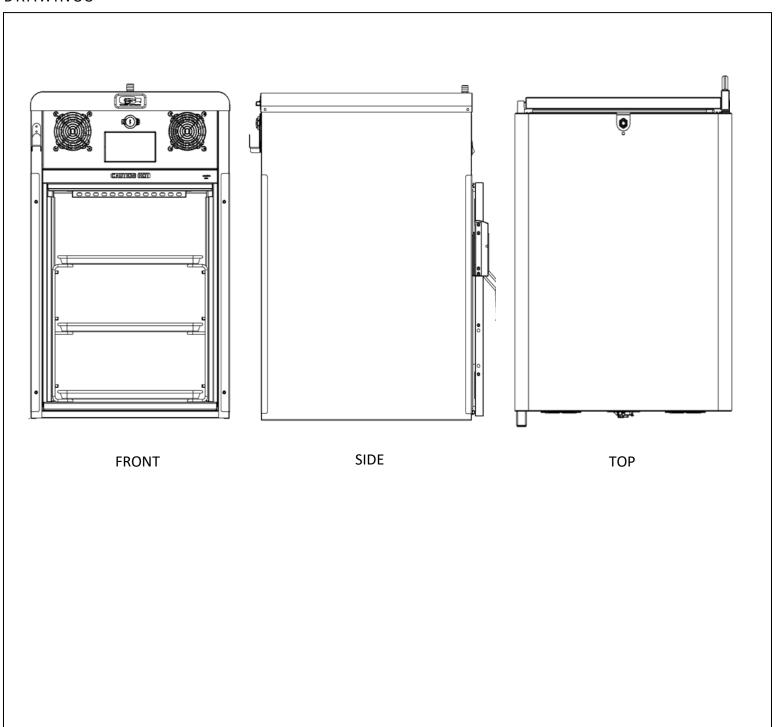

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE FOR PRODUCT IMPROVEMENT AND INNOVATION



KCL & REVIT DRAWINGS UPON REQUEST