




CLAMSHELL 2-SIDED COOKING

CLAMSHELL 2-SIDED COOKING SOLUTIONS

OPTIONS for LANG 200/100 SERIES GRIDDLES (23" PLATE DEPTH ONLY)

CCSE12A* CONTACT CLAMSHELL

The Contact Clamshell delivers high power cooking from both sides. This griddle innovation slashes cooking time with no flipping required! Ideal for burgers, chicken and other uniform thickness proteins

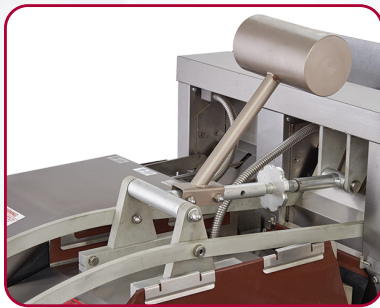

CCSE12A

* CCSE12A clamshell not available on 60" & 72" wide griddle models

CSE12AG RADIANT CLAMSHELL

Powerful infrared elements activate when the hood is lowered to cook quickly. Excellent for proteins, and can rethermalize much like a cheesemelter! 3" clearance provides menu flexibility



CSE12AG





CSG24 GAS INFRARED CLAMSHELL

24" wide gas infrared elements activate when the hood is lowered, this adds a broiled flavor profile. Exceptional for high-volume protein cooking. 3-in clearance for irregular-shaped products



CSG24

CONTACT & RADIANT CLAMSHELL COOK TIMES

	 HAMBURGER PATTY Quarter lb. frozen			CHICKEN BREAST  Slack 6 oz.		
	Griddle	Griddle with CONTACT Clamshell	Griddle with RADIANT Clamshell	Griddle	Griddle with CONTACT Clamshell	Griddle with RADIANT Clamshell
TOTAL COOK TIME	8 min.	3:45 min.	4 min.	10 min.	3:30 min.	5 min.
TIME per each SIDE	4 min.	-	2 min.	5 min.	-	2:30 min.
internal TEMP.	160°F+	160°F+	160°F+	160°-170°F	160°-170°F	160°-170°F

Flat Griddle & Clamshells @ 350°F



CLAMSHELL 2-SIDED COOKING

CLAMSHELL 2-SIDED COOKING SOLUTIONS

CLAMSHELLS for 200/100 SERIES (23" PLATE DEPTH GRIDDLES) ONLY



LANG GAS & ELECTRIC CLAMSHELL 2-SIDED COOKING SOLUTIONS

Series No.	Description	Factory mounted price, each	Watts ¹ 208V or 240V	Width [in.]	Depth [in.]	Height ³ [in.]	Installed Wt. [lb.]
CCSE12	12" ELECTRIC CONTACT CLAMSHELL	\$21,346	4,200	11	23.00	26.40	100
CSE12AG	12" ELECTRIC RADIANT CLAMSHELL	\$14,463	3,200	11	23.00	25.30	45
Series No.	Description	Factory mounted price, each	BTU ²	Width [in.]	Depth [in.]	Height ³ [in.]	Installed Wt. [lb.]
CSG24	24" GAS INFRARED CLAMSHELL	\$29,433	24,000	23.10	28.20	50.10	125
1 - Specify 208V or 240V service. All units must be hard-wired at installation for 1-phase or 3-phase service.							
2 - Specify Natural Gas, Propane Gas or Elevation requirements when ordering. Utilizes 120V/60Hz/0.5kW electrical connection.							
3 - Height is measured off the griddle surface, and at maximum incline							
CCSE12-10NS	NON-STICK SHEET KIT (for CCSE12A CLAMSHELL) - 10 SHEETS INCLUDED						\$1,769

LANG CLAMSHELL MOUNTING FRAMES

GRIDDLE WIDTH	24" Wide	36" Wide	48" Wide		
FRAME MODEL for 12" ELECTRIC CONTACT CLAMSHELLS	CCSE12AMG-24	CCSE12AMG-36	CCSE12AMG-48		
Factory mounted price	\$2,809	\$3,859	\$4,436		
GRIDDLE WIDTH	24" Wide	36" Wide	48" Wide	60" Wide	72" Wide
FRAME MODEL for 12" ELECTRIC RADIANT CLAMSHELLS	CSE12AMG-24	CSE12AMG-36	CSE12AMG-48	CSE12AMG-60	CSE12AMG-72
Factory mounted price	\$2,953	\$3,746	\$4,519	\$5,148	\$5,484
GRIDDLE WIDTH	24" Wide	36" Wide	48" Wide	60" Wide	72" Wide
FRAME MODEL for 24" GAS CLAMSHELLS	CSG24MG-24	CSG24MG-36	CSG24MG-48	CSG24MG-60	CSG24MG-72
Factory mounted price	\$1,418	\$1,675	\$1,964	\$2,093	\$2,347
Installed weight [lb.]	35	53	70	88	105

CONFIGURING YOUR CLAMSHELL

- Step 1 Select your griddle - gas or electric
- Step 2 Add the frame required for clamshell mounting
- Step 3 Select the type and number of clamshells needed
- Step 4 Specify location of each clamshell on your griddle
- Step 5 Add up costs & weights to arrive at final specification

The addition of Clamshell hoods increases the weight of the final griddle system and may exceed the weight rating of many basic kitchen stands, including those sold by Star

Clamshells cannot be installed on extra-deep griddles
Clamshells only available on Lang 100 & 200 series griddles